


DS-2CE16C8T-IW3Z

HD720P Motorized Vari-focal HLC Bullet Camera

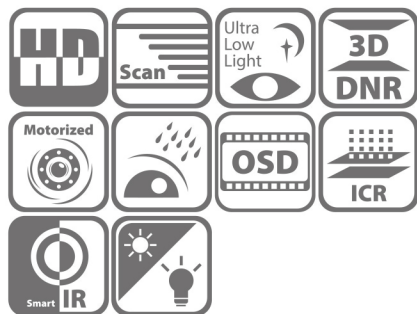


Key features

- 1.27 Megapixel high-performance CMOS
- Analog HD output, up to 720P resolution
- Low illumination
- 6 – 22mm motorized vari-focal lens
- True Day/Night
- OSD menu, 3D DNR
- IP66 weatherproof
- Up the Coax(HIKVISION-C, Pelco-C Protocol)

Available Models

DS-2CE16C8T-IW3Z

Dimension

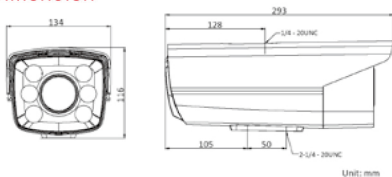

Accessories



DS-2CE16C8T-IW3Z

Camera	
Image Sensor	1.27MP CMOS Image Sensor
Signal System	PAL/NTSC
Effective Pixels	1305(H) * 977(V)
Min. illumination	0.001 Lux @(F1.2,AGC ON), 0 Lux with white light
Shutter Time	1/25(1/30)s to 1/50,000s
Lens	6–22mm motorized VF lens
Lens Mount	Ø14
Day & Night	Color
Synchronization	Internal synchronization
Video Frame Rate	720p@25fps/720p@30fps
HD Video Output	1 Analog HD output
CVBS Output	1Vp-p Composite Output(75Ω/BNC)
S/N Ratio	> 62dB
Menu	
Auto Gain	Low/Middle/High/Off
D/N Mode	Color
White Balance	Auto/Manual
Private Mask	On/Off, maximum 8 zones
Motion Detection	On/Off, maximum 4 zones
Exposure Mode	Global Exposure/Digital WDR
3D DNR	Low/Middle/High/Off
Language	English/Chinese
Function	Contrast/Sharpness/Saturation/Mirror/Digital zoom
White Light Control	On/Off/1-5 adjustable level
General	
Operating Conditions	-40℃ ~ 60℃ (-40 °F ~ 140 °F), Humidity 90% or less (non-condensing)
Power Supply	12 VDC±15%
Power Consumption	Max. 5W
Protection Level	IP66
Light Distance	30–40m
Communication	Up the coax, Protocol: Pelco-C(CVBS output), HIKVISION-C(TVI output)
Dimensions	134×116×293mm(5.28×4.57×11.54)
Weight	1600g